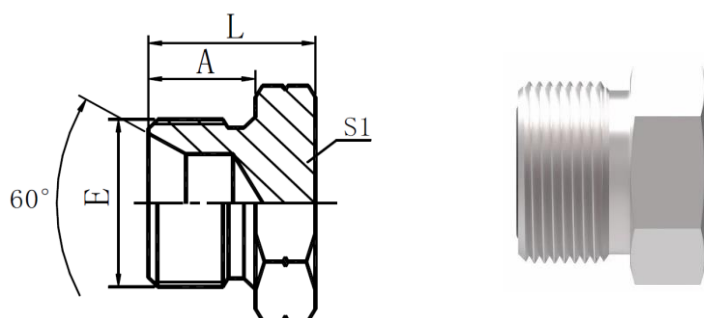


MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL PLUG


BS 2779, ISO 228/1

BS 21, ISO 7/1

PART NO.	THREAD				DIMENSIONS				
	E				A	L	S1		
4VTB-02Z	G1/8"X28				10	16	14		
4VTB-04Z	G1/4"X19				12	18	19		
4VTB-06Z	G3/8"X19				13.5	21.5	22		
4VTB-08Z	G1/2"X14				16	26	27		
4VTB-10Z	G5/8"X14				17.5	27.5	30		
4VTB-12Z	G3/4"X14				18.5	29.5	32		
4VTB-16Z	G1"X11				20.5	34	41		
4VTB-20Z	G1.1/4"X11				20.5	37.5	50		
4VTB-24Z	G1.1/2"X11				23	40	55		
4VTB-32Z	G2"X11				25.5	43.5	70		

Connector material	Part. No. suffix	No. example
Carbon steel (Default)	Z	4VTB-08Z
304 stainless steel	SR	4VTB-08SR
316L stainless steel	SV	4VTB-08SV
316Ti stainless steel	SY	4VTB-08SY

Plating method	Part. No. suffix	Part No. example	White rust (Hours)	Red rust(Hours)
Cr3+ plating (Default)	Z	4VTB-08Z	96	360
Durakote plating	ZD	4VTB-08ZD	360	720
Zinc-nickel plating	ZN	4VTB-08ZN	1000	-